

## Installation instruction

### 1. Storage of KOMFORTEX® Products and adhesive cements

KOMFORTEX® products should normally be stored in dry areas at constant temperature above 10°C. If stored below 10°C, store the fencing elements at the installation site temperature (> 10°C) for at least 2 hours before installation.


Important note: Adhesive cements must be stored at all times in dry locations above 0°C. To avoid colour variations due to differences in sunlight exposure, leave the UV protection film on the products as supplied until just prior to installation.

### 2. Required Tools

- Steel straight edge (e.g. carpenters square 600 mm)
- Cutting knife, heavy duty, with replacement blades
- Tape measure or meter stick
- Felt-tip markers (water –soluble) or chalk, etc.
- Chalk line with refill chalk
- Hand saw, sabre saw or band saw (with blades for wood)
- Drilling machine, power screwdriver
- Kneepads
- **3 Screws per element (not in the shipment included)**
- **Recommendation for concrete MULTI-MONTI®-PLUS screws M10 X 140 mm**
- **Recommendation for timber Holz M 10 x 140 mm**


### 3. Subbase

Concrete bordering elements or existing foundation, timber bordering elements

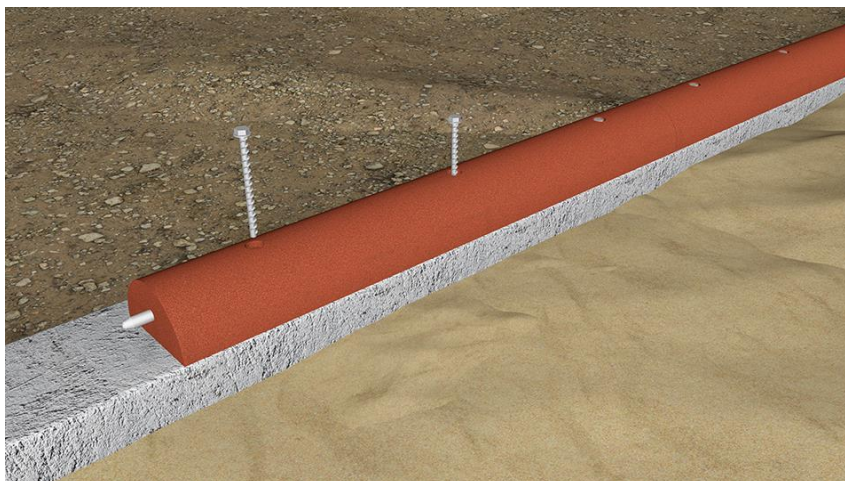



### 4. Installation

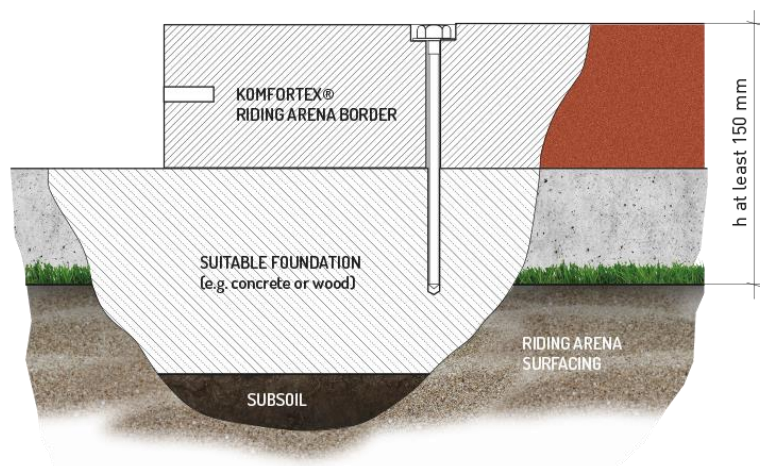

Mark the needful screwing holes M 10 with short spot drill through the rubber riding arena border.



Perform the deepness minimum 60 mm.

All information without guarantee, subject to change. The installation instruction is not subject to any change service.  
Each current and valid from can be recalled at [www.kraiburg-relastec.com/komfortex](http://www.kraiburg-relastec.com/komfortex)

page 2 of 4





Screwing 3 MULTI-MONTI®-PLUS screws M10 X 140 mm per element.  
Connect the single elements with integrated connector pins.



All information without guarantee, subject to change. The installation instruction is not subject to any change service.  
Each current and valid from can be recalled at [www.kraiburg-relastec.com/komfortex](http://www.kraiburg-relastec.com/komfortex)

page 3 of 4

Please note that in time of spread the sand it's not happens that the riding area border will damaged.



Please replenish the outside border section with sand for stabilization.  
With using the riding border maintenance will be easy and the riding sand will be safe against blending with the outside area. It looks nice and makes it safer for horse and rider.

**Attention!**

**The main field of application of the Komfortex riding border is the zoning of the riding areas against the surrounding area. The product is primary a bordering and could only temporary working against a horse hoof beat.**

**We advise explicit that defects at our KOMFORTEX® horse paddock fencing, based on incorrect handling of a leveling machine could not be excluded, and are without any guarantee!**