

1. Applications

EUROFLEX® Diamond is a design element that can be used as a seat, balancing element or demarcation element. It lines up seamlessly between cube and ball and provides a further design option.

EUROFLEX® Diamond is manufactured by an environment-friendly process and can be recycled as process raw material at the end of their service life.


2. Material standard Diamond

Rubber granulate: granulated recycled rubber
Binding agent: MDI polyurethane
Colour: red, green, grey or black

Diamond with EPDM topping

Rubber granulate: granulated recycled rubber
Binding agent: MDI polyurethane
Topping: Coloured EPDM rubber granulate

Colour:

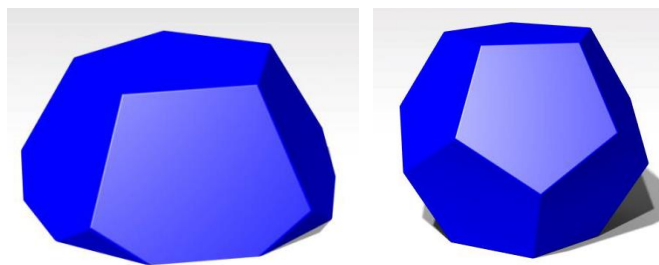

All information without guarantee, subject to change. The Data Sheet is not subject to any change service. Each current and valid from can be recalled at www.kraiburg-relastec.com/euroflex

3. Characteristics

Surface: minor colour variation possible
smooth with open pores

4. Dimensions / Tolerances half Diamond

Dimension: approx. 500 x 500 x 225mm
Weight standard: approx. 29,0 kg
Weight EPDM covered: ca. 32,0kg
Tolerances: +/- 0,8%
Ground anchor: Diameter ca. 42,8 mm, Length approx. 750 mm

5. Dimensions / Tolerances Diamond

Dimension: approx. 500 x 500 x 450 mm
Weight standard: approx. 58,0 kg
Weight EPDM covered: approx. 64,0kg
Maßtoleranzen: +/- 0,8%
Ground anchor: Diameter ca. 42,8 mm, Length approx. 750 mm

6. Test Data

Conformity acc. to Regulation (EC) 1907/2006 SVHC list and appendix XVII

Production facility inspection

7. Installation

Install EUROFLEX® Diamond by inserting their steel anchors. Please note the complete installation instruction.