

1. Application

KOMFORTEX® horse paddock fencing are used as bordering for natural areas for example turf and sand places.

They offer based on the elastic material an optimum of safety for the rider and the horse. The installation is easy and fast with the provided fastening elements.

2. Material

Rubber granulate: granulated recycled SBR rubber
Binding agent: MDI polyurethane


3. Characteristics

Colour: Reddish brown, green, grey or black
(Minor colour variation possible)

Surface: smooth with open pores

Any other: 2 integrated connector pins

Product design

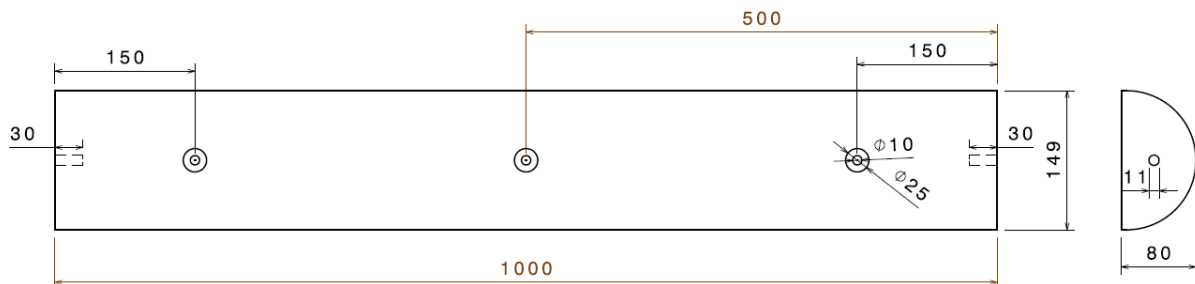

All information without guarantee, subject to change. The Data Sheet is not subject to any change service. Each current and valid from can be recalled at www.kraiburg-relastec.com/komfortex

page 1 of 3

4. Dimensions / Tolerances

L x W x T:	1000 x 149 x 80 mm
Weight:	approx. 8,3 kg/ piece
Dimensional tolerances:	+/- 0,8%


5. Product testing

Production facility inspection

Fire resistance:	E	(DIN EN 13501-1, 2010)
Cold fracture resistance:	24h / -40°C, no fracture	
Cold crack resistance:	5h / -30°C, no cracks	

6. Installation

KOMFORTEX® riding area border could be screwed easily on existing concrete or timber border.

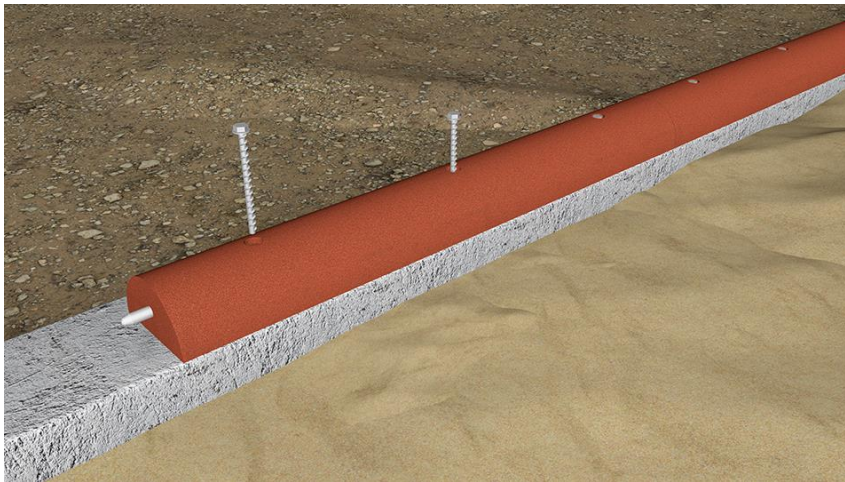



Attention!

It is recommended to use for example 3 MULTI-MONTI®-PLUS screws M10 X 140 mm. Please note the screws are not included.

We advise explicit that defects at our KOMFORTEX® horse paddock fencing, based on incorrect handling of a leveling machine could not be excluded, and are without any guarantee!

Note the complete installation instruction.