

KOMFORTEX® Softborder are used besides outdoor stalls and pens, washing bays and paddocks. **KOMFORTEX® Softborder** is made from selected recycled rubber material which is highly flexible (90°), easy to cut, highly resistant to outdoor weathering and provides maximum protection against injuries.


Material

Material:

Recycled rubber granules bonded with MDI polyurethane

Product design

Colours:

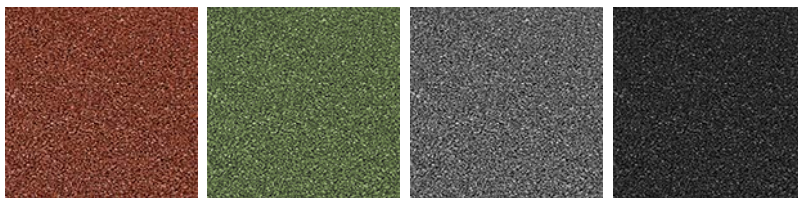

red, green, grey, black

Surface:

smooth with open pores One side has anchoring grooves near lower edge Two connector pins for connection to adjacent elements.

Dimensions / Tolerances / Weight

Length x width x thickness: 1000 x 250 x 50 mm

Weight: approx. 11,0 kg

Tolerances: length, width: $\pm 0,8\%$, thickness: ± 2 mm

The product data sheet is not subject to any change service! All information is without guarantee.

Latest version of this document available on www.kraiburg-relastec.com/komfortex

page 1 of 2

Product Testing

Fire resistance:	E (DIN EN 13501-1, 2007)
Chemical resistance:	conditionally resistant to acids and bases
Cold fracture resistance:	24h / -40°C, no fracture
Cold crack resistance:	5h / -30°C, no cracks
Abrasion resistance:	rV 5,9 (DIN 18035)

Installation

Insert **KOMFORTEX® Softborder** elements in prepared fresh concrete bed (grade: B15), forming concrete to a slope 10 cm high on both sides of the edging elements. Be certain that the anchoring grooves are covered by the concrete.

Apply 1-component PU adhesive cement on mating surfaces of elements to be connected. Join the elements using the connector pins supplied.