

golf slab

Product data sheet no. 9151 - R-05

Issue: February 2022

SPORTEC® golf slab is the ideal flooring for walkways, terraces and teeing areas on golf courses. It offers a pleasant waling feeling and protects the golf club by its springy effect. The integrated connector pin system allows cost-effective and easy installation. The installation in T-connection guarantees a very good dimensional stability. Environmentally friendly production and recycling. (KRAIBURG Relastec GmbH & Co.KG double recycling guarantee).

Material


Material:

Recycling tyre rubber granules bonded with polyurethane elastomer.

Product design

Colour(s): red (black, grey or green on request) (small colour differences can occur due to raw material)

Colour(s):

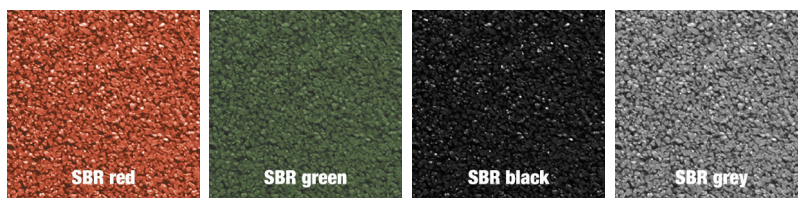

Surface: open-pored smooth

Lower side: dimpled

Dimensions / Tolerances / Weight

Thickness(es): 30 mm (± 2 mm)

Length x width: 500 mm / 500mm (± 0.8 %)

Area weight: approx. 26.4 kg/m²

The product data sheet is not subject to any change service! All information is without guarantee.

Latest version of this document available on www.kraiburg-relastec.com/sportec

page 1 of 3

golf slab

Product data sheet no. 9151 - R-05

Issue: February 2022

Product Testing

Fire resistance:	Efl (B2) (EN 13501-1)
Tensile strength:	min. 2.04 N/mm ² (EN ISO 1798)
Elongation at break:	min. 104 % (EN ISO 1798)
Hardness:	60 ± 5 Shore A (DIN 53505)
Resistance:	UV resistance: resistant to DIN EN 1297, DIN EN ISO 3386-2 Chlorine resistance: resistant to DIN EN ISO 175, DIN EN ISO 3386-2 Salt water resistance: resistant to DIN EN ISO 175, DIN EN ISO 3386-2
Temperature range:	-30° C to 80° C (internal tested)
Wear behaviour:	rV = 14.3 (DIN V 18035-6)
Remaining deformation:	0.41mm (DIN V 18035-6)
Coefficient of friction:	wet: 0.55μ (DIN 18032-2:2001-04) dry: 0.74μ (DIN 18032-2:2001-04)
Light reflectance (LRV):	value 3.0 % (at black) (EN 17317)
VOC emission rating:	



The product data sheet is not subject to any change service! All information is without guarantee.

Latest version of this document available on www.kraiburg-relastec.com/sportec

page 2 of 3

Installation

Installation has to be done in accordance to the Installation Recommendation of **SPORTEC® golf slab**. The latest version of the Installation Recommendation can be downloaded at the website of KRAIBURG Relastec GmbH & Co. KG.

The product data sheet is not subject to any change service! All information is without guarantee.

Latest version of this document available on www.kraiburg-relastec.com/sportec

page 3 of 3