

1. Substrate

The firmly compacted stone aggregate substructure consists of a building ground, base layer and leveling over which the elastic layers roll out directly. It must be constructed by that way that it carries small vehicles. Installation can only be done on a leveled substrate.

Generally every firmly compacted substructure is adapted as underground for the installation of **SPORTEC® team soft** when it complies with the formalities and regulations of the particular sports federations and associations. Not possible is an installation of the elastic layer on substructures made of sand.

2. Preparation Work

The surface of the substrate has to be relieved of leaves, branches and other pollutions. Unevenness must be removed before starting with the installation. The elastic layer is delivered in rolls and has to be stored at site for about 1-2 days by a temperature of 15°C-25°C to ensure correct acclimatization. On the day previous day to installation, roll out the material in the way it should be installed so that the rolls can relax.



Prepared substrate with edge borders

3. Installation

After the leveling is prepared start with the installation. Hereunto place the first roll on a corner/ edge of the field to be installed. Unroll a small piece of material from the roll (approx. 30-50cm), place this piece in the edge of the corner and roll out the material straight along the edge. Roll out the material in same direction every time and make sure that the roll is laid straight and position the adjoining edges flush against one another so that there are no gaps between the neighboring sections. If necessary glue the artificial grass lanes with a seaming tape.

The installation recommendation is not subject to any change service! All information is without guarantee.

Latest version of this document available on www.kraiburg-relastec.com/sportec

page 1 of 4


Elastic Layers for Outdoor Areas

Installation Recommendations no. 9112 - R - 05

Issue: September 2023



Start installation at the edge borders and cut off too much material

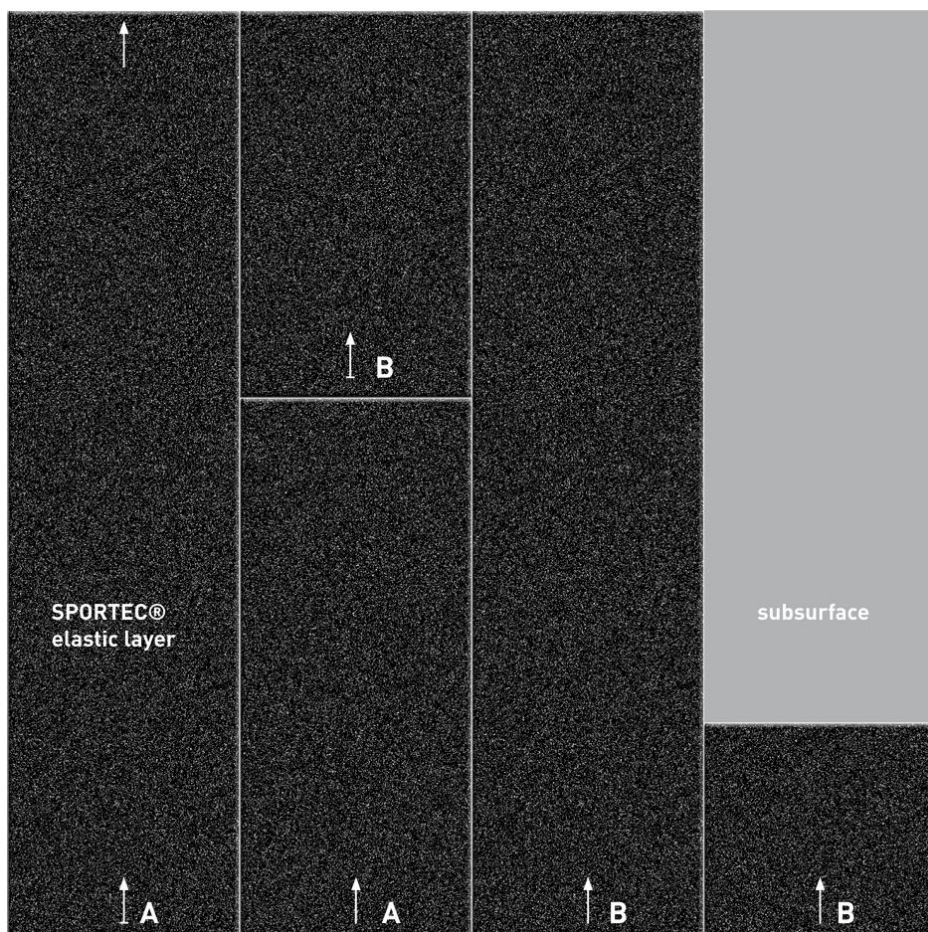

Install rolls in the same direction

Use material from the same production batch; find the production batch reference at labels placed on the roll.

The installation recommendation is not subject to any change service! All information is without guarantee.
Latest version of this document available on www.kraiburg-relastec.com/sportec

page 2 of 4

Elastic Layers for Outdoor Areas
Installation Recommendations no. 9112 - R - 05

Issue: September 2023



Production batch no.

5800205	No. 96742
Stärke (mm)	6
Breite (mm)	1500
Länge (mm)	20000

Production reference batch no.

4. Artificial grass applying

After installation of **SPORTEC® team soft**, and when glue of seaming tape is cured, start application of artificial grass carpet. Refer to manufacturer instructions, installation guidelines and prepared project drawings to ensure the correct installation.



Roll out of artificial grass layer and gluing of the lines

5. Important details

During application of 2-component PU adhesive, sand and EPDM-granules as filler or any such additives pay attention to and follow the manufacturer's instructions.

When calculating the needed amount of material, calculate with **3%** for **cut-off**.

Fixings and anchorages on the field must be marked and cut out of the elastic layer during installation by using a normal sharp carpet cutter.

The installation recommendation is not subject to any change service! All information is without guarantee.
 Latest version of this document available on www.kraiburg-relastec.com/sportec

page 3 of 4

Elastic Layers for Outdoor Areas**Installation Recommendations no. 9112 - R - 05**

Issue: September 2023

Rubber products have an odour typical of the material, which decreases over time.
This can be accelerated by regular airing.

In case of claims caused of mistakenly delivered goods, defective goods, insufficient quantities or other possible faults stop the installation and make a claim immediately. A claim of delivered material is only possible with untreated/uninstalled material and with a confirmation of the production batch reference number.

DISCLAIMER:

These recommendations for application and installation are based on our extensive experience and on current technological practice. Our liability and responsibility in the event of damages shall be limited to the extent defined in our General Terms and Conditions of Business, regardless of the above recommendations or of any statements made or advice given by our sales representatives or applications engineering staff.