


Tender Specification

EUROFLEX® Pavement Blocks used in sports and recreational facilities e.g. for football and basketball. Certified in accordance with EN 1177:2018, EN 1176-1:2017. They could use for playing equipment's with a critical fall high up to 1,0m.

Material: bonded rubber granulate
 Colours: red, green, black, grey
 Slight material-related colour variations possible.

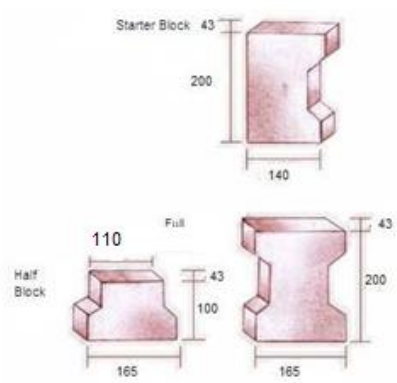

Dimensions [mm]	
Weight [kg/unit]	Qty. Required
Full blocks: approx. 1,0	35/ m ²
Half blocks: approx. 0,5	4/ rm
Starter blocks: approx. 1,9	5/ rm

Dimensional tolerances: length, width: +/- 0,8 %, thickness: +/- 2 mm
Weight: + 0,200 kg/ unit

All information without guarantee, subject to change. The Tender Specification is not subject to any change service. Each current and valid from can be recalled at www.kraiburg-relastec.com/euroflex

Manufacturer
KRAIBURG Relastec GmbH & Co.KG
Fuchsberger Str. 4, D-29410 Salzwedel
Tel.: +49/8683-701-145, Fax.: +49/8683-701-4-145

EUROFLEX® Pavement Blocks are manufactured by an environment-friendly process and can be recycled as raw material at the end of their service life.

Material: granulated recycled rubber and colored MDI polyurethane

Physical Characteristics:
Production facility inspection

Permissible fall height: in accordance with DIN EN 1177:2018,
EN 1177:2018, DIN EN 1176-1:2017,
EN 1176-1:2017

HIC 1000: 1,0m

Fire resistance: Class E DIN EN 13501-1, 2010

Production facility inspection

Abrasion resistance: rV 5,9 DIN 18035

Installation Instruction

Pour level layer of lean concrete or crushed rock over frost-stable sub grade.

If the surface covered is an existing concrete or asphalt surface, take care to provide sufficient slope for water drain-off and level off any irregularities.

Note the complete Installation Instruction.