

edge- & corner ramps

Product data sheet no. 9143 - R-05

Issue: October 2022

SPORTEC® edge- & corner ramps are the perfect complement to our SPORTEC® style and SPORTEC® base tiles. With its beveled edges, they provide a smooth and safe transition zone, reducing the risk of tripping when entering or leaving heavy weight areas.

Material


Material:

Polyurethane-bonded recycling tyre rubber granules

Product design

Colour(s): black or red
(EPDM colours are available on request)
low colour differences are conditional of material

Colour(s):

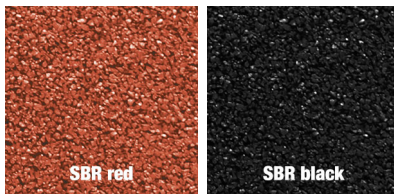

Surface: open-pored smooth
Lower side: smooth bearing surface

Dimensions / Tolerances / Weight

Thickness(es): edge profile:
30/10 mm ; 70/20 mm (± 2 mm)
corner profile:
30/10 mm , 70/20 mm (± 2 mm)

The product data sheet is not subject to any change service! All information is without guarantee.

Latest version of this document available on www.kraiburg-relastec.com/sportec

page 1 of 3

edge- & corner ramps

Product data sheet no. 9143 - R-05

Issue: October 2022

Length x width:	edge profile: 1,000 x 250 mm ($\pm 0.8\%$) (outer edge) 1,000 x 250 mm ($\pm 0.8\%$) (inner edge) corner profile: 1,000 x 250 mm ($\pm 0.8\%$) (outer edge) 750 x 250 mm ($\pm 0.8\%$) (inner edge)
Area weight:	edge profile: approx. 4.2 kg/m ² (at 30/10 mm) approx. 8.5 kg/m ³ (at 70/20 mm) corner profile: approx. 3.9 kg/m ² (at 30/10 mm) approx. 7.4 kg/m ³ (at 70/20 mm)

Product Testing

Fire resistance:	Efl (B2) (EN 13501-1)
Tensile strength:	min. 0.5 N/mm ² (EN ISO 1798)
Elongation at break:	min. 40 % (EN ISO 1798)
Hardness:	60 \pm 5 Shore A (DIN 53505)
Resistance:	conditionally: acid & bases (internal tested) resistant: saltwater
Temperature range:	-30°C to 80°C (internal tested)
Cold fracture resistance:	24h / -40°C, no fracture (internal tested)
Cold crack resistance:	5h / -30°C, no fracture (internal tested)
Light reflectance (LRV):	value 3.0 % (at black) (EN 17317)
VOC emission rating:	



The product data sheet is not subject to any change service! All information is without guarantee.

Latest version of this document available on www.kraiburg-relastec.com/sportec

page 2 of 3

edge- & corner ramps**Product data sheet no. 9143 - R-05**

Issue: October 2022

Installation

Installation has to be done in accordance to the Installation Recommendation of **SPORTEC® edge- & corner ramps**. The latest version of the Installation Recommendation can be downloaded at website of KRAIBURG Relastec GmbH & Co. KG.

It is recommended to glue **SPORTEC® edge- & corner ramps** with the PU adhesive OTTOCOLL P83 (colour grey) or OTTOCOLL M500 (colour red) which is available directly from our company. One tube is sufficient for approx. 3m gluing.

The product data sheet is not subject to any change service! All information is without guarantee.

Latest version of this document available on www.kraiburg-relastec.com/sportec

page 3 of 3